

AIR DIFFERENTIAL PRESSURE TRANSMITTER

Etrans -GNT-AIR Datasheet



Precise Measurement,
Ultimate Control

AIR DIFFERENTIAL PRESSURE TRANSMITTER

MODEL Etrans-GNT-AIR SERIES



Application Areas

HVAC & Building Automation
Pharmaceutical Manufacturing
Cleanroom Facilities
Data Centers
Food & Beverage Processing

Features

- Multi-Sensor Capability: Measures differential pressure, temperature, and humidity simultaneously.
- Flexible Analog Outputs: Selectable 0-10V or 4-20mA signals.
- Integrated Relays: Two 5A relay outputs for direct setpoint control.
- Digital Communication: Built-in RS485 Modbus integration.
- Clear Display: 2-line backlit LCD for real-time monitoring.
- Versatile Options: Available with or without the screen.
- Wide Voltage Support: Operates on a 7/36 VDC power supply.

Description

Product Description The Enellean Etrans-GNT-AIR is a highly versatile and advanced transmitter engineered to measure the differential between two pressure points with exceptional precision, while simultaneously reading ambient temperature and humidity data via an integrated digital communication sensor. Equipped with onboard relays, the device allows users to define specific setpoints for temperature, humidity, or differential pressure, enabling automated on/off control of external systems directly from the unit.

It provides flexible integration into existing industrial infrastructures by offering selectable 0-10V or 4-20mA analog outputs, which can be dynamically assigned to any of the measured environmental parameters. Furthermore, comprehensive RS485 Modbus compatibility ensures that all sensor data can be continuously monitored, relays can be driven remotely, and analog outputs can be configured directly from a central control system. For immediate on-site convenience, instantaneous temperature, humidity, and pressure difference values can be easily read directly from the device's display.




GNT-AIR-1001



GNT-AIR-1002

Structure

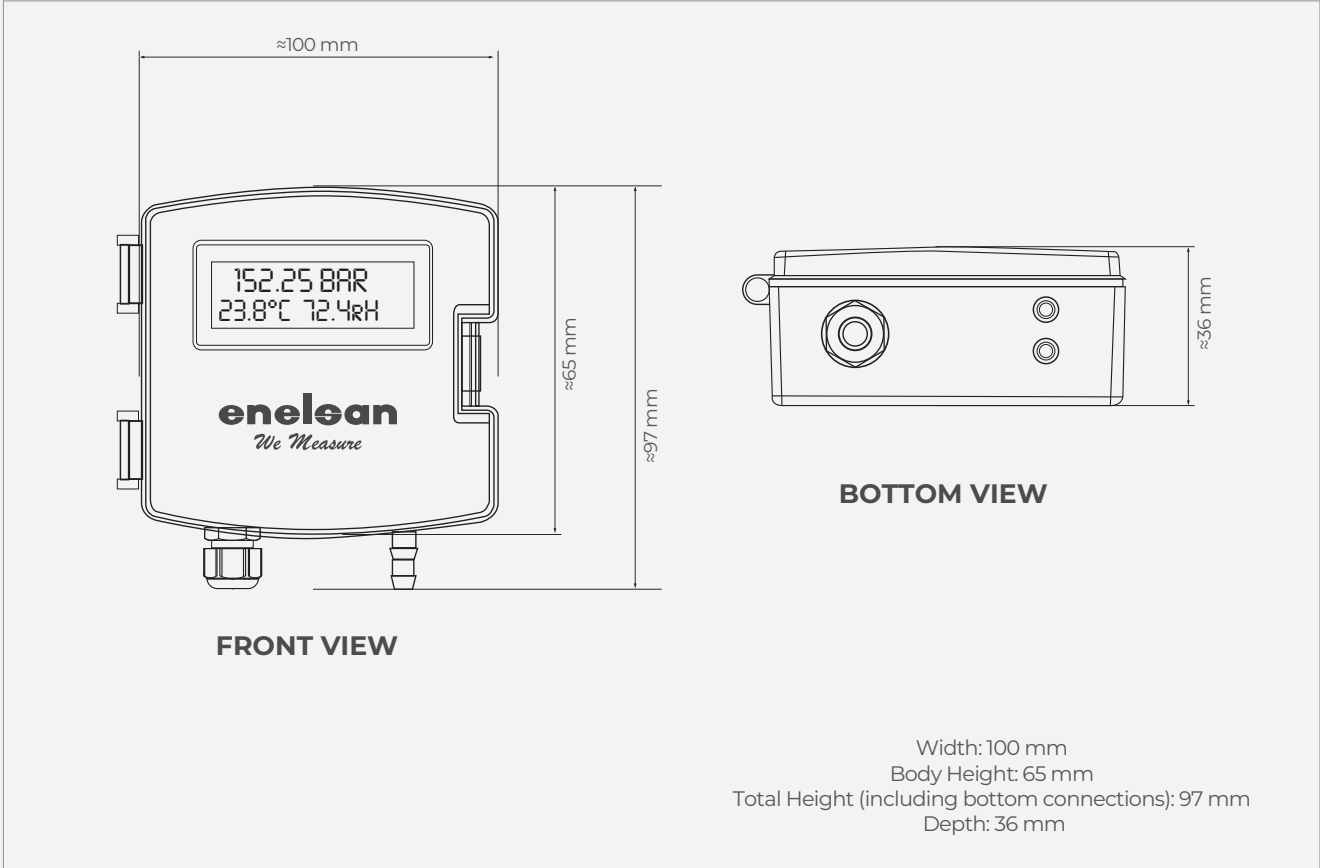

TECHNICAL FEATURES

Brand / Model Code	Enelsan Etrans-GNT-AIR
Pressure Measurement Range	-25mbar ~ +25mbar, -100mbar ~ +100mbar, -250mbar ~ +250mbar, -600mbar ~ +600mbar. Selectable as vacuum, pressure, or differential. Custom project-based values are also available.
Pressure Accuracy	±0.25% (-20°C ~ 85°C)
Temperature Range	-40°C ~ 85°C
Temperature Accuracy	±0.4°C
Humidity Range	0%rH ~ 100%rH
Humidity Accuracy	±3%rH
Analog Outputs	Selectable 0-10V or 4-20mA (can be assigned to temperature, humidity, or differential pressure)
Relay Outputs	2 x 5Amp Relay Output (can be set to open/close based on temperature, humidity, or pressure differences)
Communication	RS485 with Modbus (allows reading of all sensor data, driving relays, and setting analog outputs)
Power Supply	7/36 VDC
Display Features	2-line backlit LCD display for real-time monitoring; available in both with-display and without-display options

Contact us

Enelsan Istanbul Office Address
Şerifali, Barbaros Cd. No: 60, 34775 Ümraniye/İstanbul

Enelsan Factory 1 Address
Çerkeşli OSB Mahallesi İmes 4 Bulvarı No: 11 Dilovası/Kocaeli

Enelsan Factory 2 Address
Çerkeşli OSB Mahallesi İmes 14. Cadde No: 17 Dilovası/Kocaeli

Phone: +90 262 754 63 13
Fax: +90 262 754 93 93
sales@enelsan.com